

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

NEW UTILITY PATENT APPLICATION TRANSMITTAL

(to be used for new applications only)

Attorney Docket Number

7948

First Named Inventor

HENRY H. JENKINS

Total Pages in this Submission

15+

APPLICATION ELEMENTS

Notice: Checklist items mentioned under Application Elements section construct a new utility patent application. Please refer to MPEP Sections 506, 601, (37CFR 1.77, 1.53, 35 USC 111, 112, 113) for detailed explanation regarding completeness of an original patent application.

1. ☒ Fee Transmittal Form (prescribed filing fee(s))

2. Specification

☒ Title of the Invention

☐ Cross References to Related Applications
(if applicable)

☐ Statement Regarding Federally-sponsored
Research/Development (if applicable)

☐ Reference to Microfiche Appendix
(if applicable)

☒ Background of the Invention

☒ Brief Summary of the Invention

☒ Brief Description of the Drawings
(if drawings filed)

☒ Detailed Description

☒ Claim or Claims

☒ Abstract of the Disclosure

3. ☒ Drawing(s) (when necessary as prescribed by
35 USC 113)

4. ☐ Executed Declaration

5. Genetic Sequence Submission
(if applicable, all must be included)

☐ Paper Copy

☐ Computer Readable Copy

☐ Statement Verifying Identical Paper and
Computer Readable Copy

ACCOMPANYING APPLICATION PARTS

6. ☐ Assignment Papers

7. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

8. ☐ Computer Program in Microfiche

9. ☐ English Translation Document (if applicable)

10. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS
Citations

11. ☐ Petition Checklist and Accompanying Petition

12. ☐ Preliminary Amendment

13. ☐ Proprietary Information

14. ☒ Return Receipt Postcard

15. ☒ Small Entity Statement

16. ☐ Additional Enclosures (please identify below):

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT

Firm
or
Individual name

Charles R. Rust

Signature

Reg #18716
Charles R. Rust

Date

5/24/00

FOR OFFICIAL USE ONLY

Application Number		Class		Independent Claims	
Date of Receipt	Application Type	GAU		Total Claims	
	Filing Date	Foreign Filing License?		Drawing Sheets	
	Small Entity	Foreign Address?		Special Handling?	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

000000-11-000000

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) & 1.27(b))—INDEPENDENT INVENTOR	Docket Number (Optional) 7948
---	---

Applicant or Patentee: Henry H. Jenkins

Application or Patent No.: _____

Filed or Issued: _____

Title: Compensating Blister Die Cutter Apparatus

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
- ☐ the application identified above.
- ☐ the patent identified above.

I have not assigned, granted, conveyed, or licensed, and am under no obligation under contract or law to assign, grant, convey, or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
- ☐ Each such person, concern, or organization is listed below.

Separate verified statements are required from each named person, concern, or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Henry H. Jenkins
NAME OF INVENTOR


Signature of inventor

5/16/00
Date

NAME OF INVENTOR

Signature of inventor

Date

NAME OF INVENTOR

Signature of inventor

Date

COMPENSATING BLISTER DIE CUTTER APPARATUS

This invention relates to a die cutter apparatus for severing blisters into individual blisters from a sheet of blisters which has been formed from a deformable transparent or translucent sheet of plastic material by a process known to those skilled in the art.

Blisters which are used in the blister packaging art are conventionally formed from a large sheet of plastic material which is heated and formed around molds to produce a plurality of the blisters as part of an integral sheet of plastic material. Because of the nature of the plastic from which the blisters are formed there is a shrinkage of the sheet upon cooling and the amount of shrinkage is dependent upon the chemical nature of the plastic from which the blisters are formed and is also dependent upon other factors too numerous to mention herein. As a result of the shrinkage, the individual blisters will end up when the sheet is cooled at various distances from each other which is inconsistent as between blisters when they are originally formed about their respective molds. In other words, the finished blisters on the formed sheet, because of the shrinkage referred to above, will have distances from their respective centerlines which is different from the centerlines of the molds used to form the blisters. As a result when it is desired to cut the individual blisters from the integral sheet and since they are varying distances apart, the blister itself will be offset from the flange surrounding it.

The present invention contemplates the construction of a blister die cutter unit which accommodates a cutter for each blister formed on a sheet of plastic material with each blister die cutter unit being movable relative to the other so as to accommodate the shrinkage and relative movement of the blisters formed on the integral plastic sheet. This results in the provision that

the rim or flange around each individual blister will be essentially concentric with the blister itself. This object of the invention will be observed with more particularity after an understanding of the structure and function which will be pointed out hereinafter.

Another object of the present invention is to produce a blister die cutter apparatus which is capable of cutting a plurality of blisters from an integral sheet on which the blisters are formed and producing an individual blister severed from the plastic sheet which is concentric with the rim or flange or ridge which is normally formed with each blister.

Another object of the invention is to provide a cutter apparatus which produces a blister which has a consistent flange about the severed blister which provides for a more reliable blister in sealing function when it is subsequently sealed to a card which carries advertising indicia thereon and which carries the product within the blister.

Another object is to provide a blister die cutter apparatus which provides a finished blister which is more pleasing in appearance, more structurally sound and which functions to hold a product in a more reliable fashion to a card or substrate to which it is subsequently sealed.

Other objects and a full understanding of this invention may be had by referring to the following description and claims, taken in conjunction with the accompanying drawings, in which:

Fig. 1 is an isometric view of a plastic sheet which has been formed into a plurality of blisters in this illustrative embodiment the blisters being six in number;

Fig. 2 is a view taken generally along the line 2-2 of Fig. 1;

Fig. 3 is a view taken generally along the line 3-3 of Fig. 1;

Fig. 4 is an isometric view of a blister severed from the sheet of Fig. 1 with the blister die cutter apparatus of the present invention;

Fig. 5 is a plan view of the blister of Fig. 4;

Figs. 6 and 7 are views similar to Figs. 4 and 5 but illustrating the defects that may occur in conventional blisters produced with conventional cutting apparatus;

Fig. 8 is an isometric view of the compensating blister die cutter apparatus of the present invention illustrating individual blister die cutter units (for example shown here as six in number) being equally spaced from each other);

Fig. 9 is an isometric view similar to Fig. 8 showing the individual blister die cutter units being slightly shifted with respect to each other illustrating how the die cutter apparatus accommodates for the shrinkage and relative movement of the blisters produced on a sheet of plastic material after the blisters are formed;

Fig. 10 is an exploded isometric view of an individual blister die cutter unit illustrated in Figs. 8 and 9;

Fig. 11 is an elevational view of an individual blister die cutter of the apparatus taken generally along the line 11-11 of Fig. 12;

Fig. 12 is a plan view Fig. 11;

Fig. 13 is an isometric view of a partially assembled blister die cutter unit shown in Figs. 10-12; and

Fig. 14 is an enlarged fragmentary view taken in the same direction as Fig. 11 showing how the adjustment members fit through the holes in the cutter structure.

5 The drawings illustrate the compensating die cutter apparatus of the present invention illustrated generally by the reference numeral 30 and which is seen in various of the views including Figs. 8 and 9 with the apparatus 30 being made up of (in the illustrated embodiment) six individual blister die cutter units identified by the reference numerals 34, 35, 36, 37, 38 and 39.

The problem which the present invention is designed to solve comes from the nature of the sheets of plastic material illustrated at 20 in Figs. 1-3 from which individual blisters are formed. The blisters in Figs. 1, 2 and 3 are identified by the reference numeral 22.

As is understood in the blister packaging industry, it is normal to form a plurality of blisters 22 on and from a sheet of polymeric material by forming a heated sheet of the polymeric material around individual molds which form the blisters 22. In this process the polymeric material is heated to a substantially high temperature, for example on the order of 400° F which allows the sheet 20 to more easily form over the individual molds and with the assistance normally of a vacuum the individual blisters 22 are formed. The sheet is then cooled and removed from the individual dies resulting in a sheet like that shown in Fig. 1. In the cooling process, a given batch of polymeric sheet material will shrink as it is cooled and will shrink irregularly. This results in the distance from individual center lines of the individual blisters being inconsistent. In most instances after a first group of blisters have been produced from a given batch of the polymeric sheet, the individual shrinkage will be somewhat consistent for subsequent sheets. When a manufacturer next goes to another batch of polymeric material the shrinkage will again, in most cases, be different and as usual inconsistent.

In the use of the blister die cutter apparatus of the present invention and for the reasons given hereinafter, it has been found that when the plurality of blisters 22 carried by the sheet 20 are cut by the present invention, blisters are produced which approach the illustrations found in Figs. 4 and 5. In the illustrations of Figs. 4 and 5, the blisters 22 are provided or produced with a rim portion 24 which is relatively symmetrical with the top portion 26 of the blister. The reason that the desirable product of Figs. 4 and 5 is produced is the construction which mounts the individual blister die cutter units 34-39 in a manner which enables each die cutter unit to move relative to each other one to accommodate for the shrinkage in the plastic sheet as described.

In previous and present date cutter mechanisms, the results that are produced are relatively inconsistent and are demonstrated in Figs. 6 and 7. It will be noted that the rim portions designated in Figs. 6 and 7 as 24A are off-center or unsymmetrical with respect to the top portions 26A. This is because the die cutter units are fixedly and immovably mounted and as a result simply cut the plastic at the position in which the die cutter units are positioned relative to each other.

Each of the blister die cutter units 34-39 is illustrated in detail in Figs. 10-14 and each includes a bottom board 44, a metal backup plate 46, and a top board 50. The boards are usually of a wood construction. The top board is provided with rule slots 52 in which is positioned a steel rule 54 to provide a cutting function by means of a cutting edge 56 formed thereon. The rule 54 in Fig. 10 has been shown discontinuous for illustrative purposes but is continuous as seen in Figs. 12 and 13. The top board is provided with bridges 58 which serve to support the

steel rule 54 within the rule slots 52 and keep the inside portion with the cavity in it from falling out.. The rule has recesses 60 provided therein which closely straddle the bridges 58. Central holes in the top board, backup plate and bottom board form a cavity 62 to receive the individual blisters 22 during a cutting operation.

5 Threaded members 64 are provided and extend through holes 66 in the backup plate and the top board 50 and are threadably received in threaded holes 68 in the bottom board 44 to hold the top board, backup plate and bottom board together fixedly as a unit.

Adjustment members 70 in the form of threaded members extend through holes 72 in the top board 50, backup plate 47 and bottom board 44 and threadably connect into threaded holes 74 in the base 31. The adjustment members 70 are fixedly secured in the base 31 and are of an outer diameter which is smaller than the diameter of the holes 72 in the top board, backup plate and bottom board. This permits the blister die cutter units to move relative to the base 31. The top board, backup plate, bottom board and associated structure comprise a support member and the member 70 of a smaller diameter than holes 72 amounts to a lost motion connection connecting the support member to the base 31.

The construction of each of the blister die cutter units 34-39 as shown in Figs. 8 and 9 is identical and each is mounted to the base 31 in the same fashion. Fig. 8 illustrates the blister die cutter units 34-39 mounted on the base with identical spacing between the edges of the units. This identical spacing has been indicated by the reference numeral 77.

20 This spacing as a matter of example only may be on the order of 1/16" to 1/8". Fig. 14 is an enlarged fragmentary view showing the members 70 and their position in openings 72 and as

depicted in Fig. 8. In order that a die cutting operation be accomplished, the sheet 20 of blisters 22 as illustrated in Fig. 1 is brought into position in the Fig. 8 condition so that a given blister 22 fits into a given die cutter unit 34-39. Any shrinkage or movement of a blister 22 relative to another blister on the sheet 20 because of shrinkage is accommodated when a blister is pushed down into the cavity 62 of a given unit which causes that unit to shift so that a given blister fits into a given cavity in a symmetrical fashion. This causes the various die cutter units 34-39 to shift relative to each other as illustrated in Fig. 9 which positions each blister in a cavity of a given die cutter unit 34-39 in a symmetrical fashion so that a product like that illustrated in Figs. 4 and 5 is produced when the cutting operation is effected.

The cutting operation is conventional in nature in that the apparatus as illustrated in Figs. 8 and 9 is mounted on the platen of a die cutting mechanism and the platen is normally moved toward a planar surface. This causes the cutting edges 56 of the individual die cutter units to sever the blisters 22 from the sheet 20. When the operation is completed and the platen is moved away, the ejection rubber 53 of each unit 34-39 ejects the cut blisters from around the steel rules 54.

It will thus be seen that the present invention accomplishes the objects hereof in that the cutting units are constructed and mounted in such a fashion that they accommodate any possible and reasonable shrinkage of sheet 20 from which the blisters are formed thereby enabling the blisters 22 to symmetrically reside in the cavities of the units. The blisters are severed in such a fashion that a symmetrical rim 34 is produced on the blisters.

Although this invention has been described in its preferred form with a certain degree of

What is claimed is:

1. A compensating blister die cutter apparatus including in combination

a base member,

at least first and second blister die cutter units supported by said base member,

each said blister die cutter unit comprising a

a support member carrying a steel rule die arranged in a configuration to cut a

blister from a sheet of substrate,

a lost motion connection connecting said support member to said base

member permitting relative lateral movement of each die cutter unit

relative to said base member.

2. A compensating blister die cutter apparatus including in combination

a base member,

at least first and second blister die cutter units supported by said base member,

each said blister die cutter unit comprising

a bottom board, a backup plate positioned on said bottom board,

a top board positioned on said backup plate,

a rule slot in said top board,

a steel rule in said rule slot and having a cutting edge,

a cavity formed in the central portion of said bottom board, backup plate and top board

as assembled,

threaded members connecting the bottom board, backup plate and top board together

to move as a unit,

vertical holes extending through the connected bottom board, backup plate and the top

board and having a diameter of a given dimension,

adjustment members extending through said vertical holes and being threaded into

said base member,

said adjustment members having a smaller diameter than said given dimension thus

permitting lateral movement of said connected bottom board, backup plate and top board

relative to said base member.

3. A compensating blister die cutter apparatus including in combination

a base member,

at least first and second blister die cutter units supported by said base member,

each said blister die cutter unit comprising a top board,

a rule slot in said top board,

a steel rule in said rule slot and having a cutting edge,

a cavity formed in the central portion of said top board,

vertical holes extending through said top board and having a diameter of a given

dimension,

adjustment members extending through said vertical holes and being connected to

said base member,

and said adjustment members having a smaller diameter than said given dimension.

Abstract of the Disclosure

A compensating blister die cutter apparatus is disclosed which has the purpose of cutting a sheet of blisters which have been formed on a sheet of plastic material in individual blisters which are generally symmetrical in configuration. The apparatus includes at least first and second blister die cutter units supported by a base member. Each of the blister die cutter units comprises a supporting member which includes a bottom board, a backup plate positioned on the bottom board, and a top board positioned on the backup plate. A rule slot is provided in the top board and a steel rule is located in the rule slot and has a cutting edge. A cavity is formed in the central portion of the bottom board, backup plate and top board as assembled to accommodate the blister shape during the cutting operation. A threaded member connects the bottom board, backup plate and top board together to move as a unit. Vertical holes extend through the connected bottom board, backup plate and top board and have a diameter of a given dimension through which adjustment members extend which are threaded into the base member. The adjustment members have a smaller diameter than the given dimension thus permitting lateral movement of the connected bottom board, backup plate and top board relative to said base member.

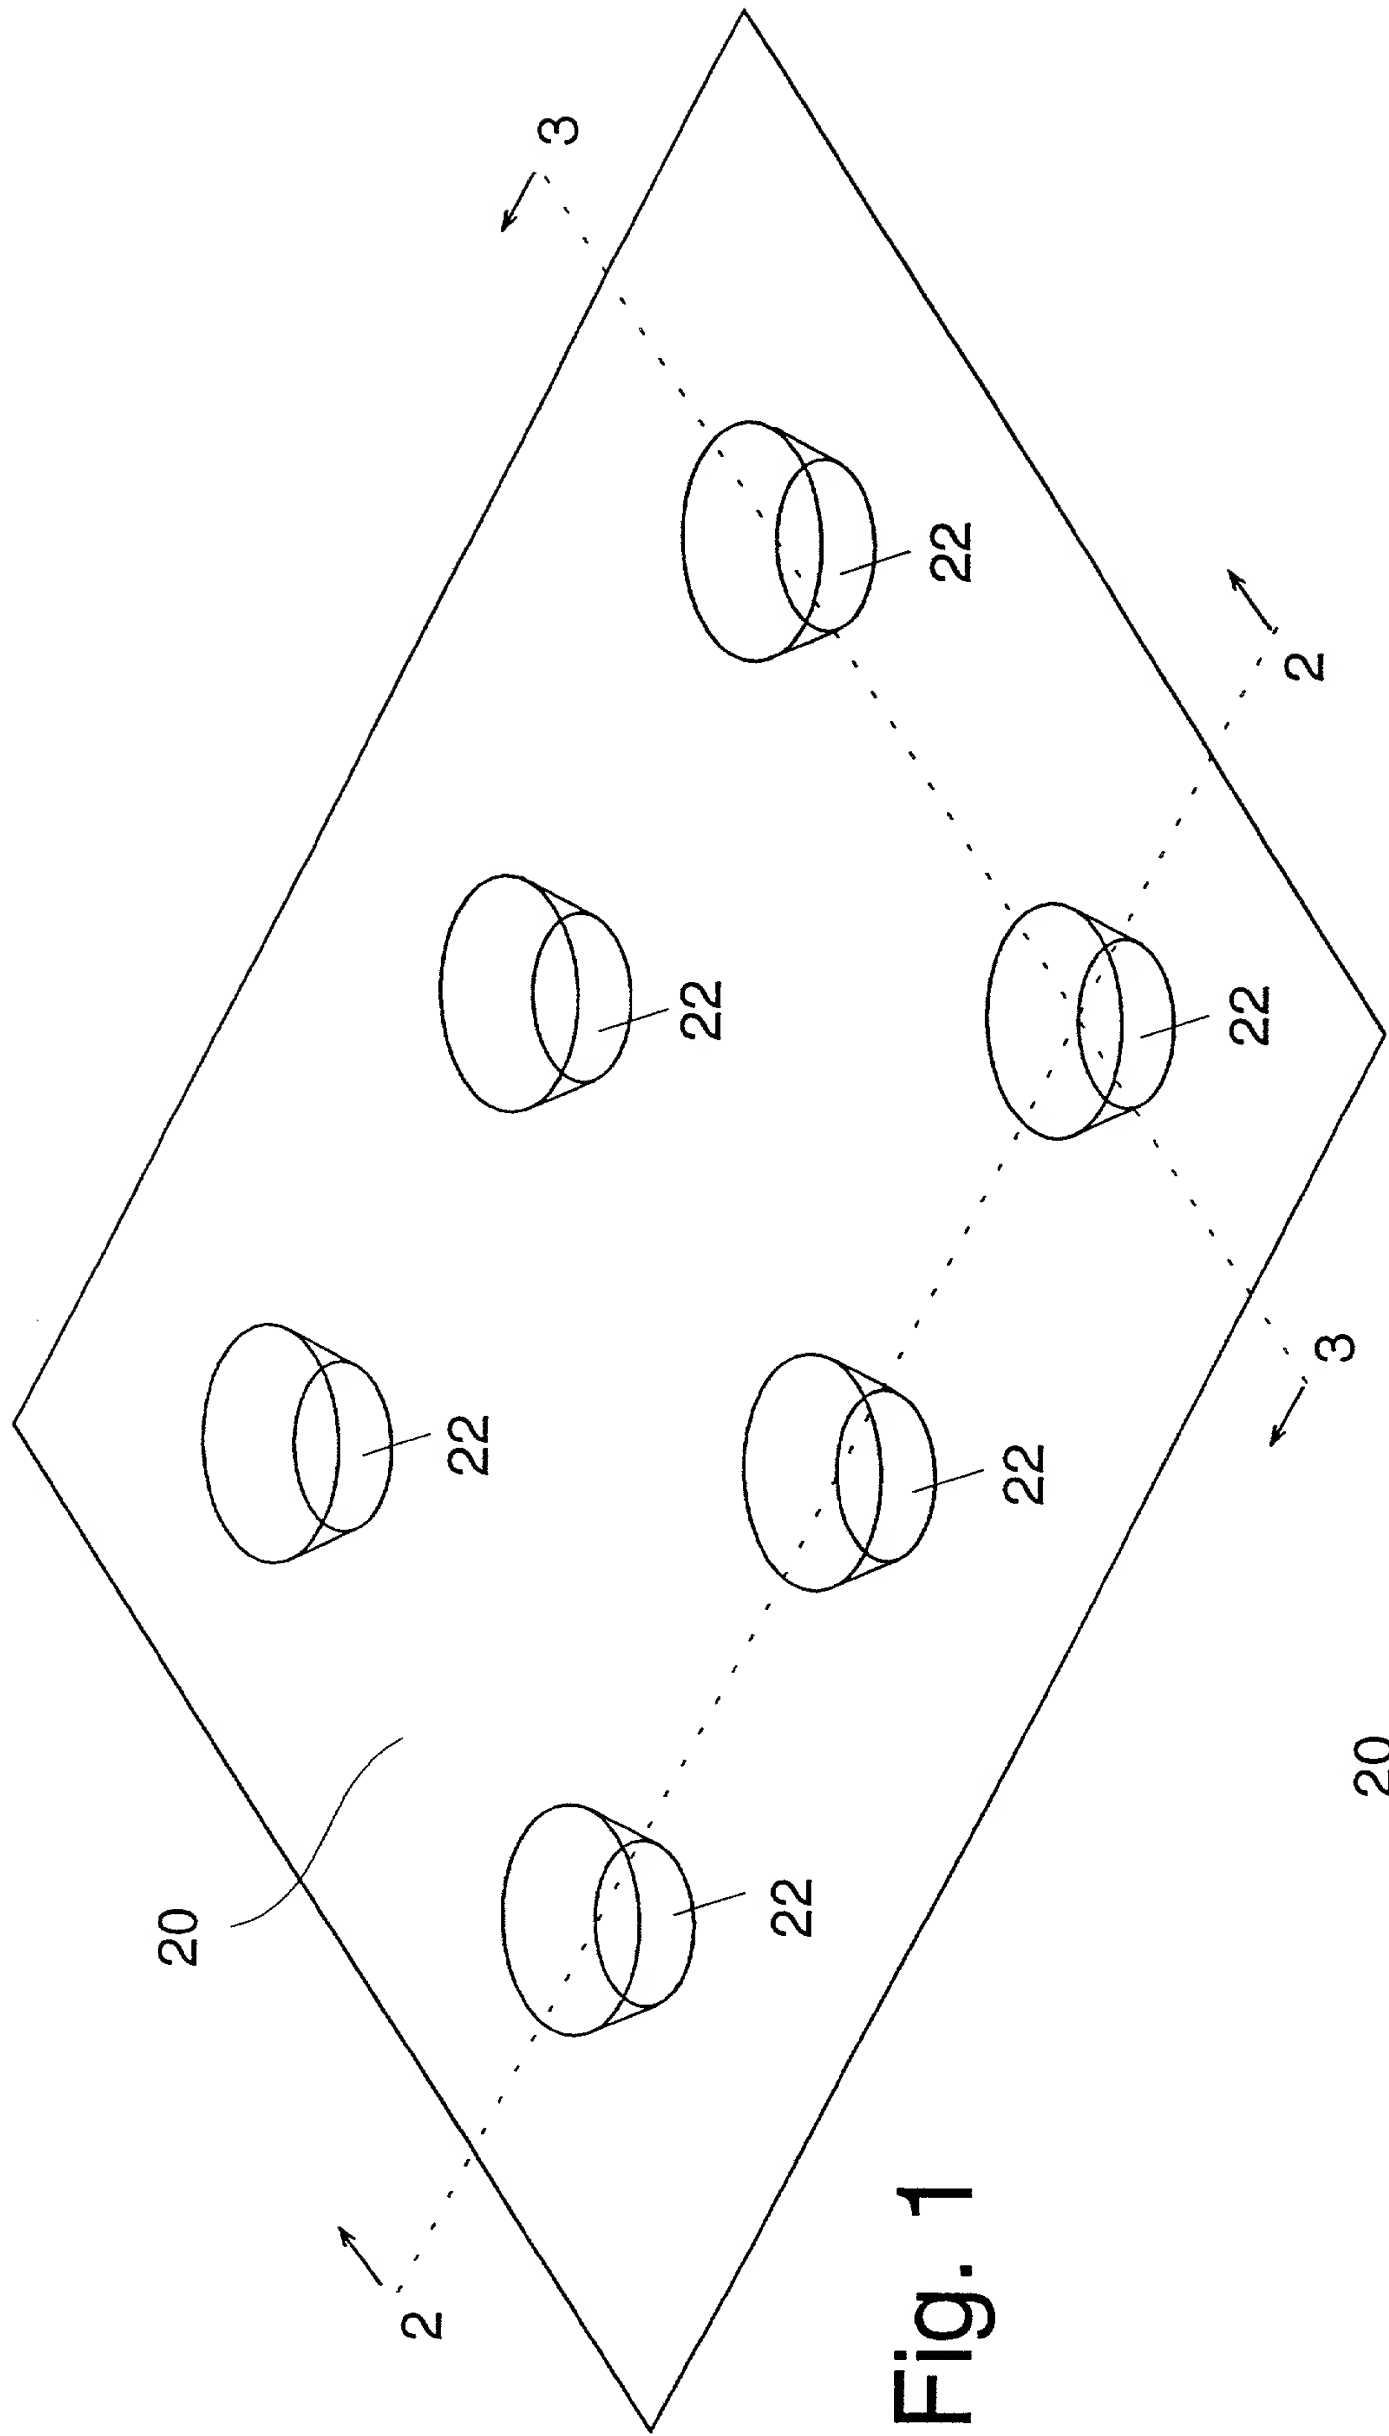


Fig. 1

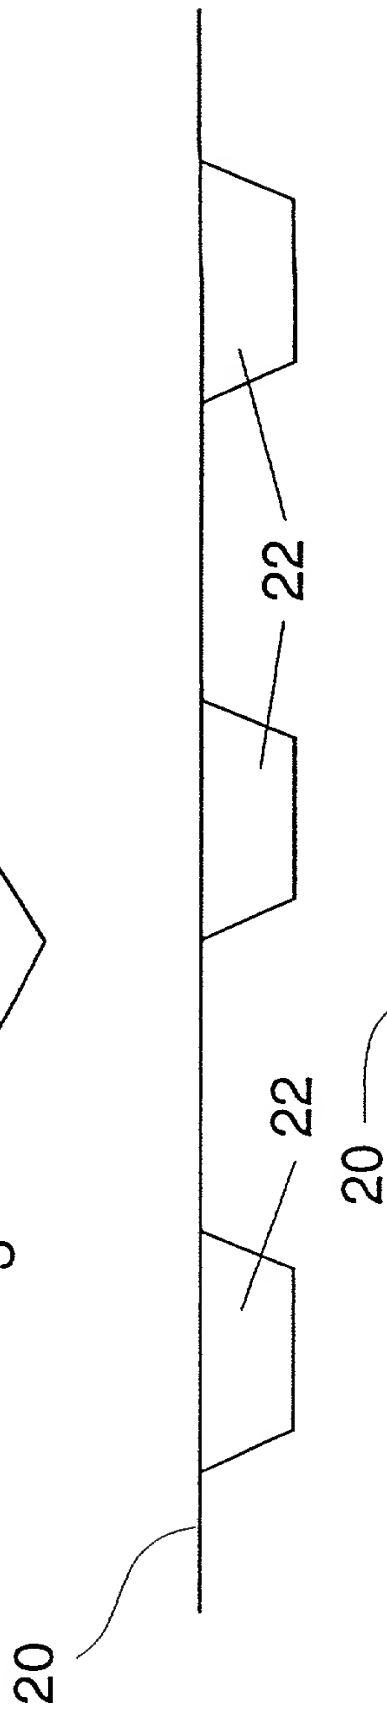


Fig. 2

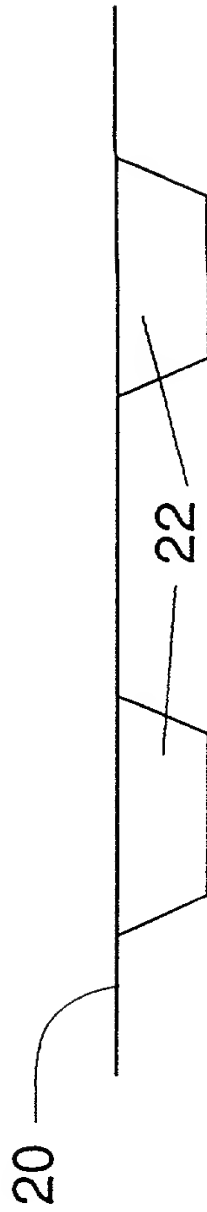


Fig. 3

Fig. 5

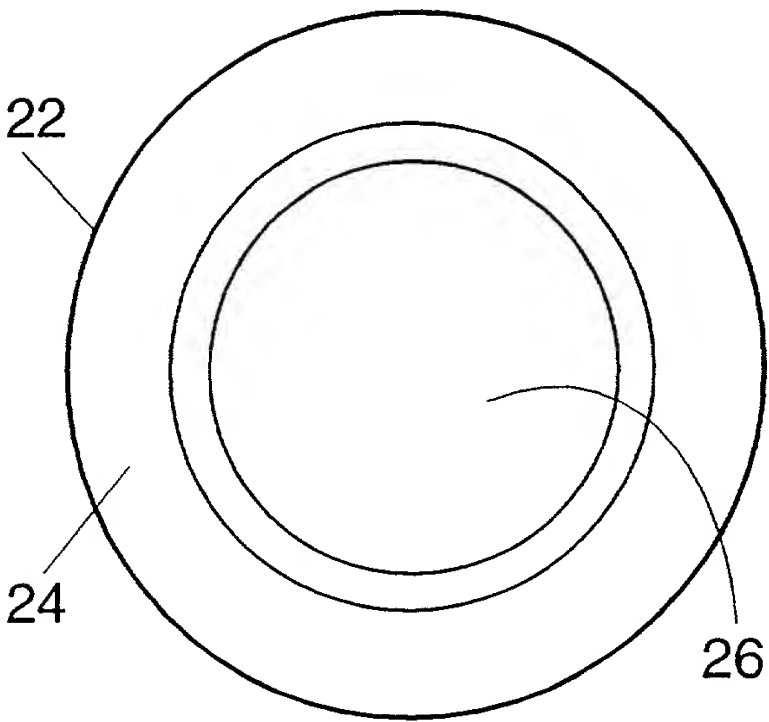


Fig. 7

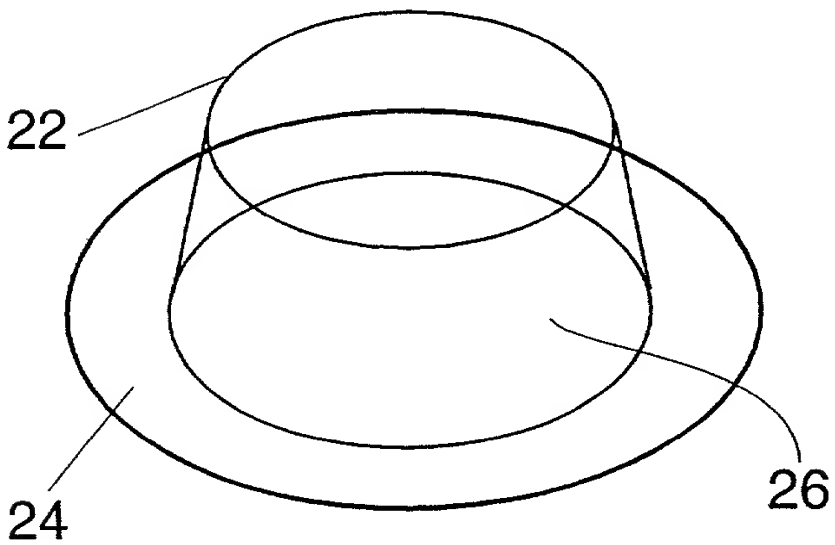
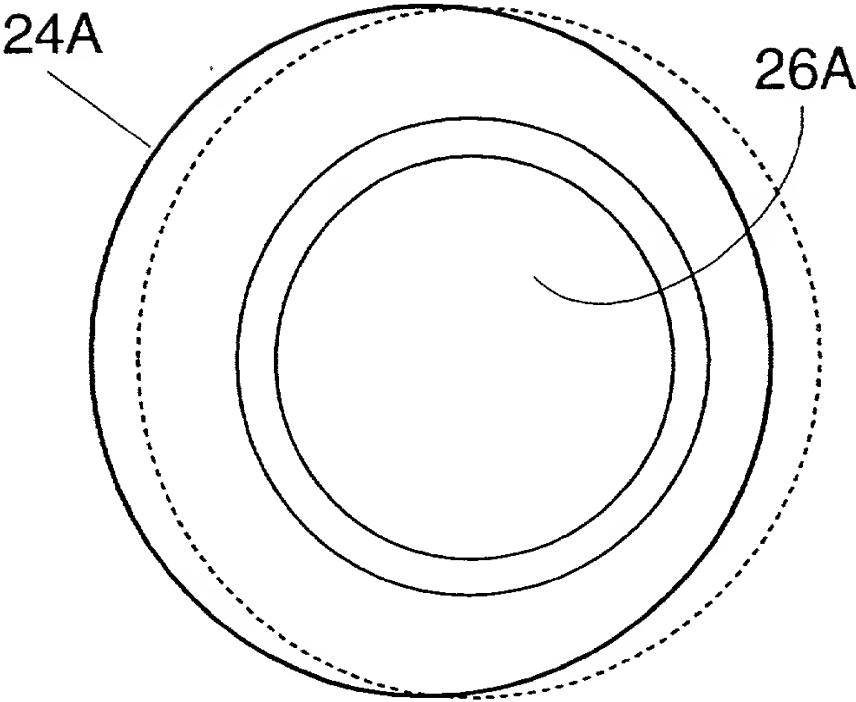


Fig. 4

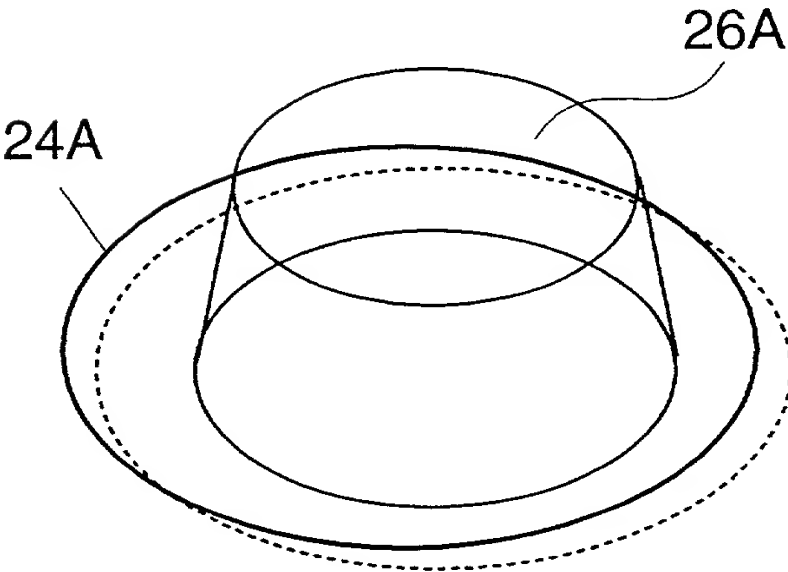


Fig. 6

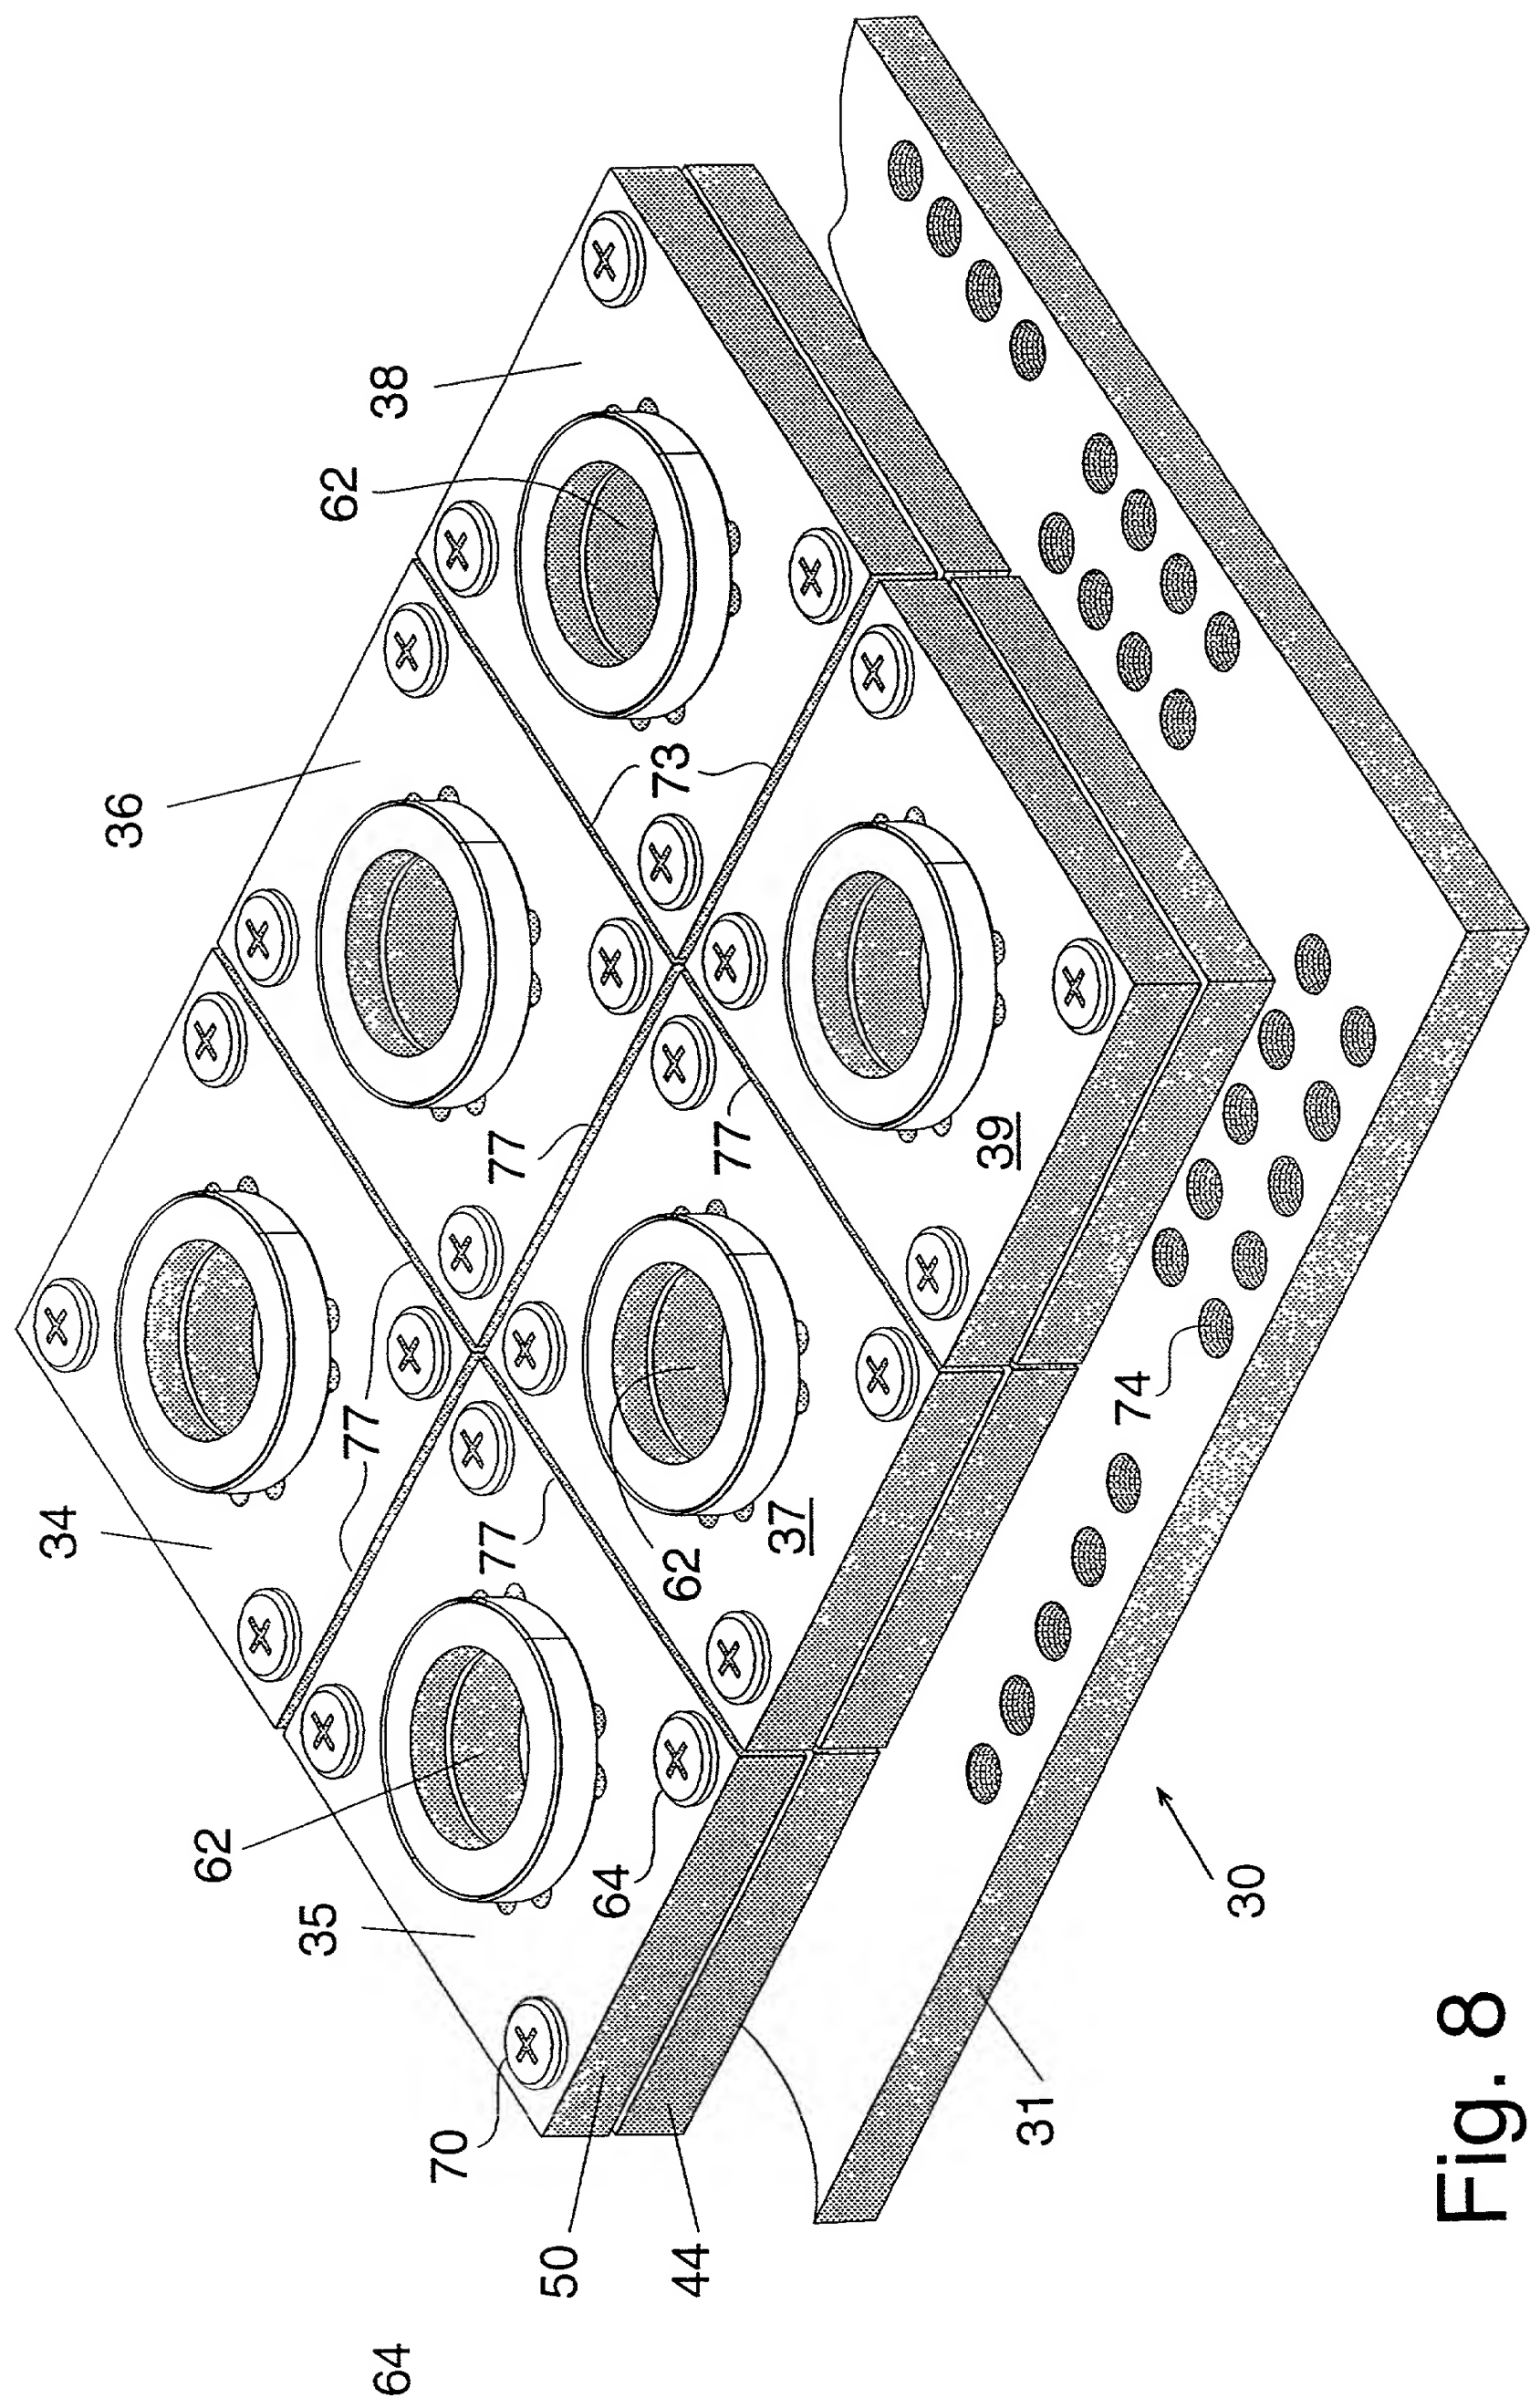


Fig. 8

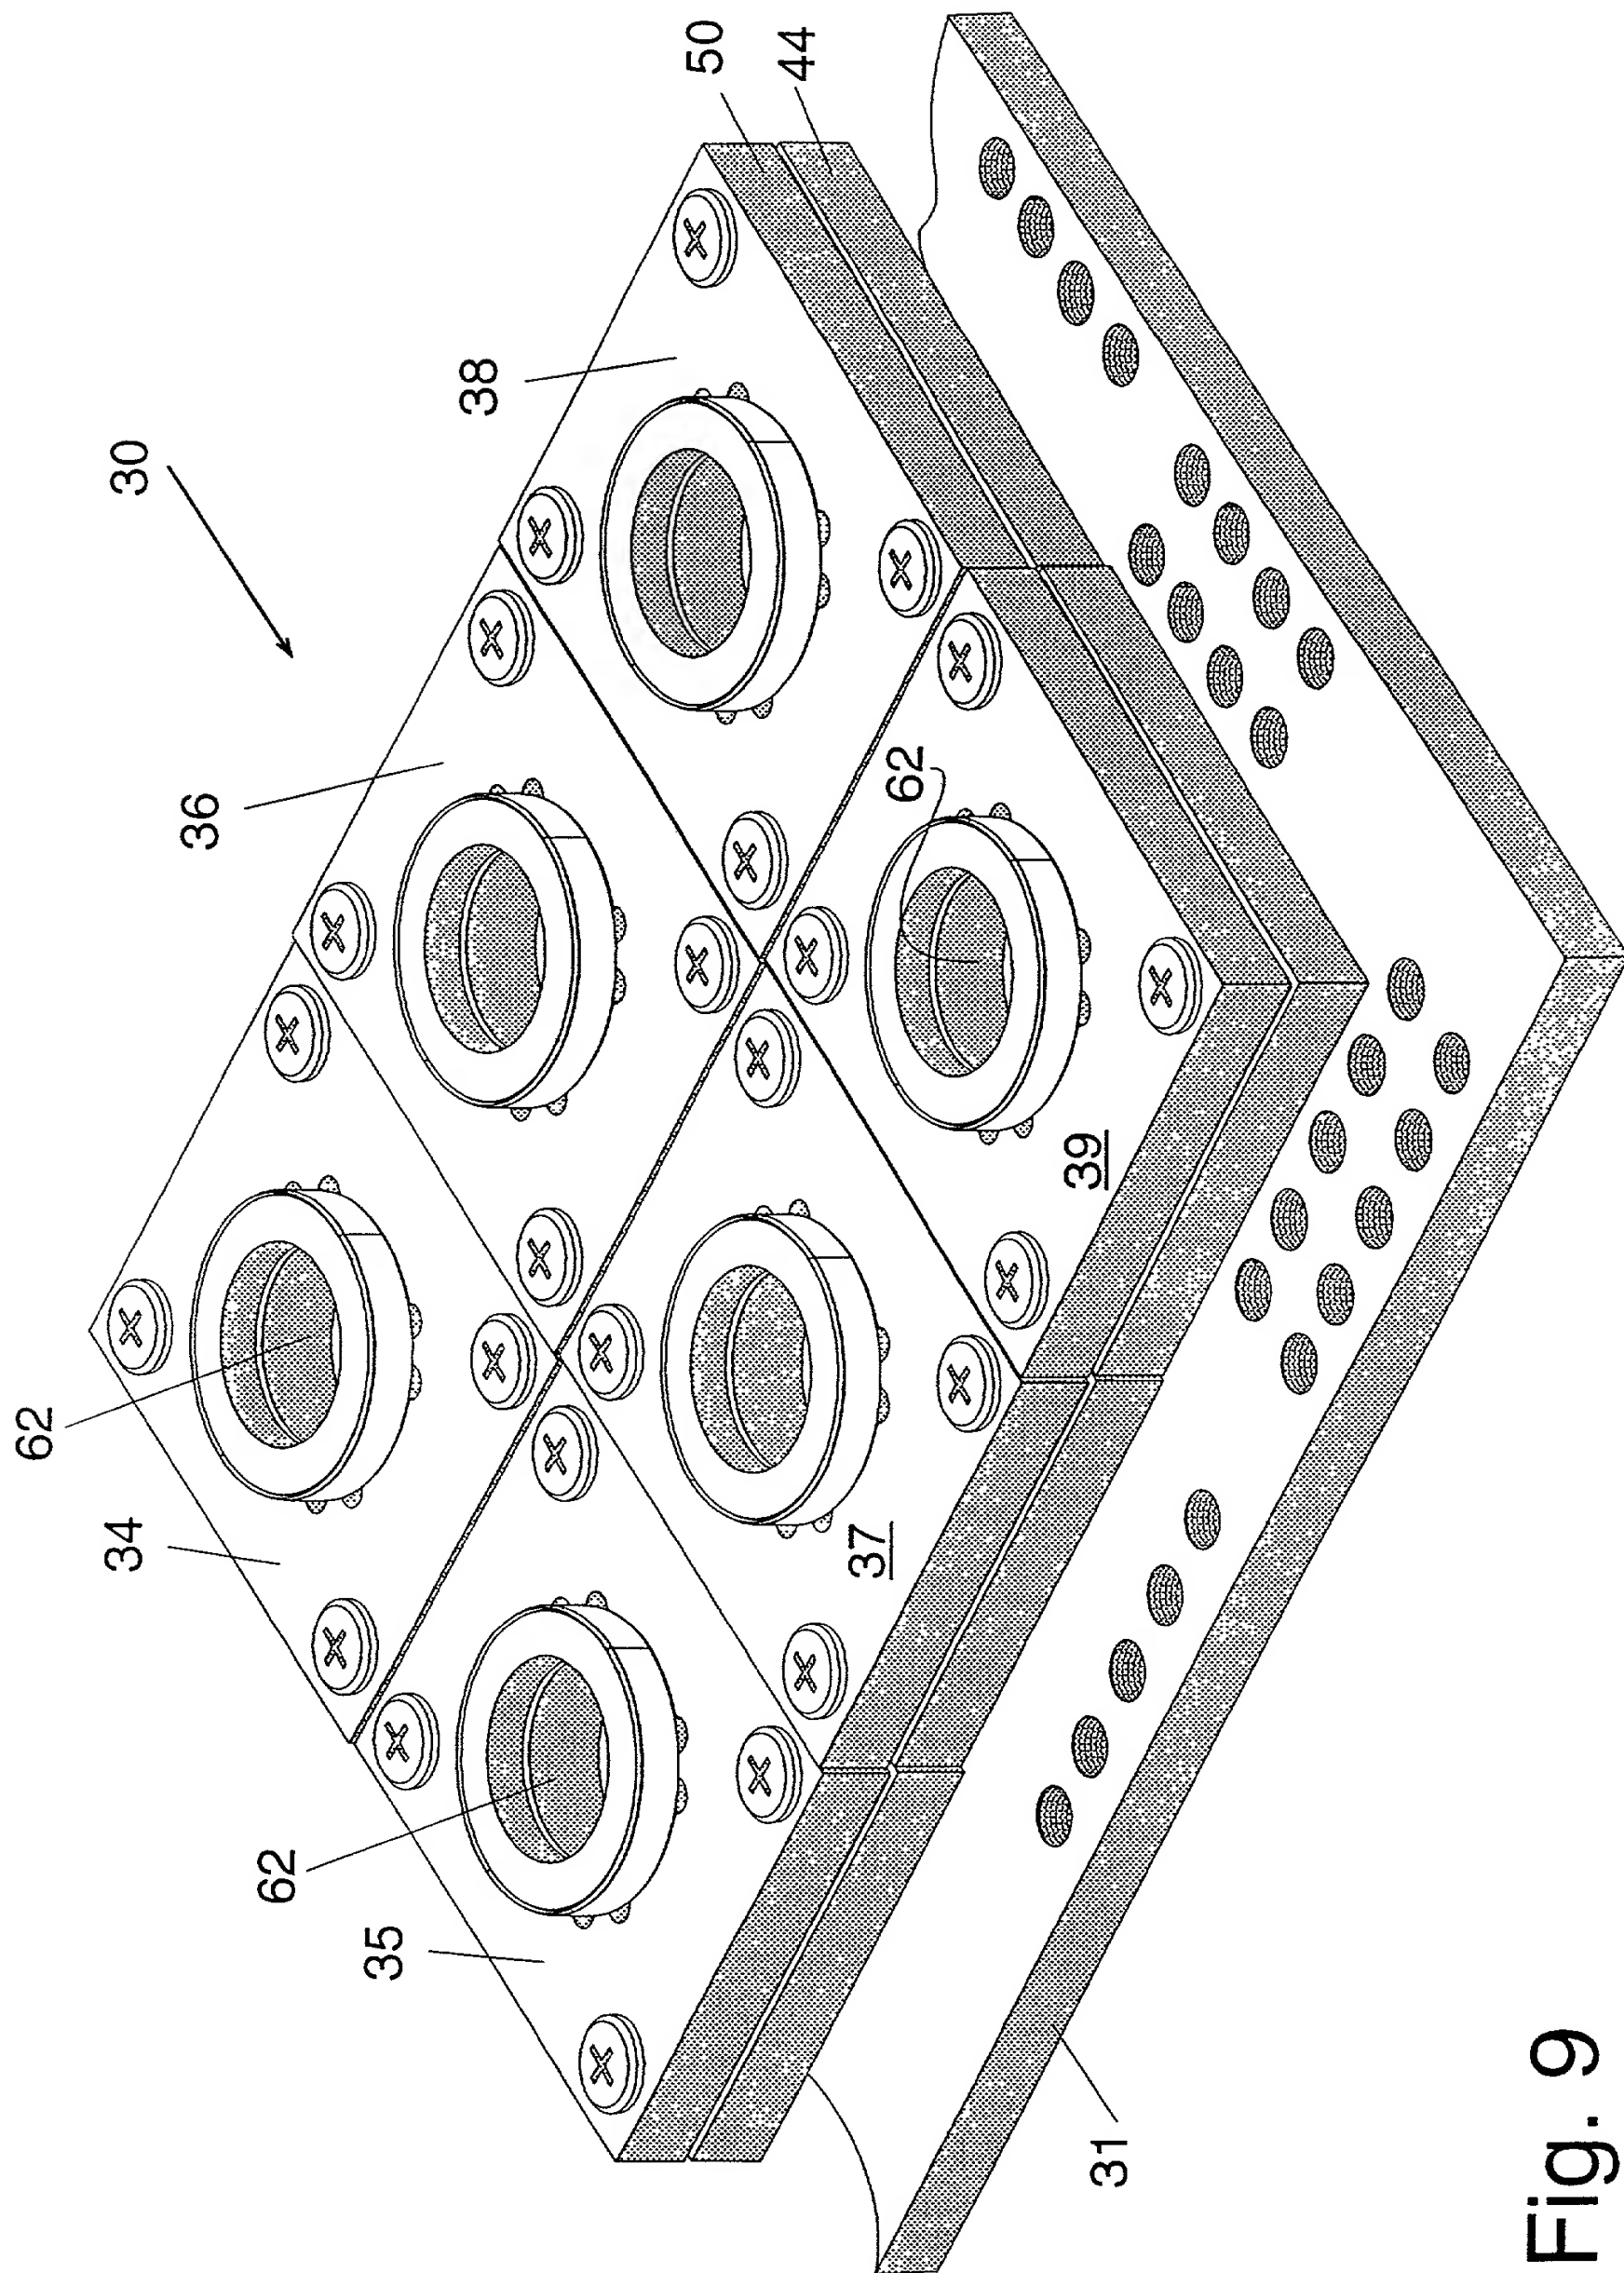


Fig. 9

00000-11708560

34

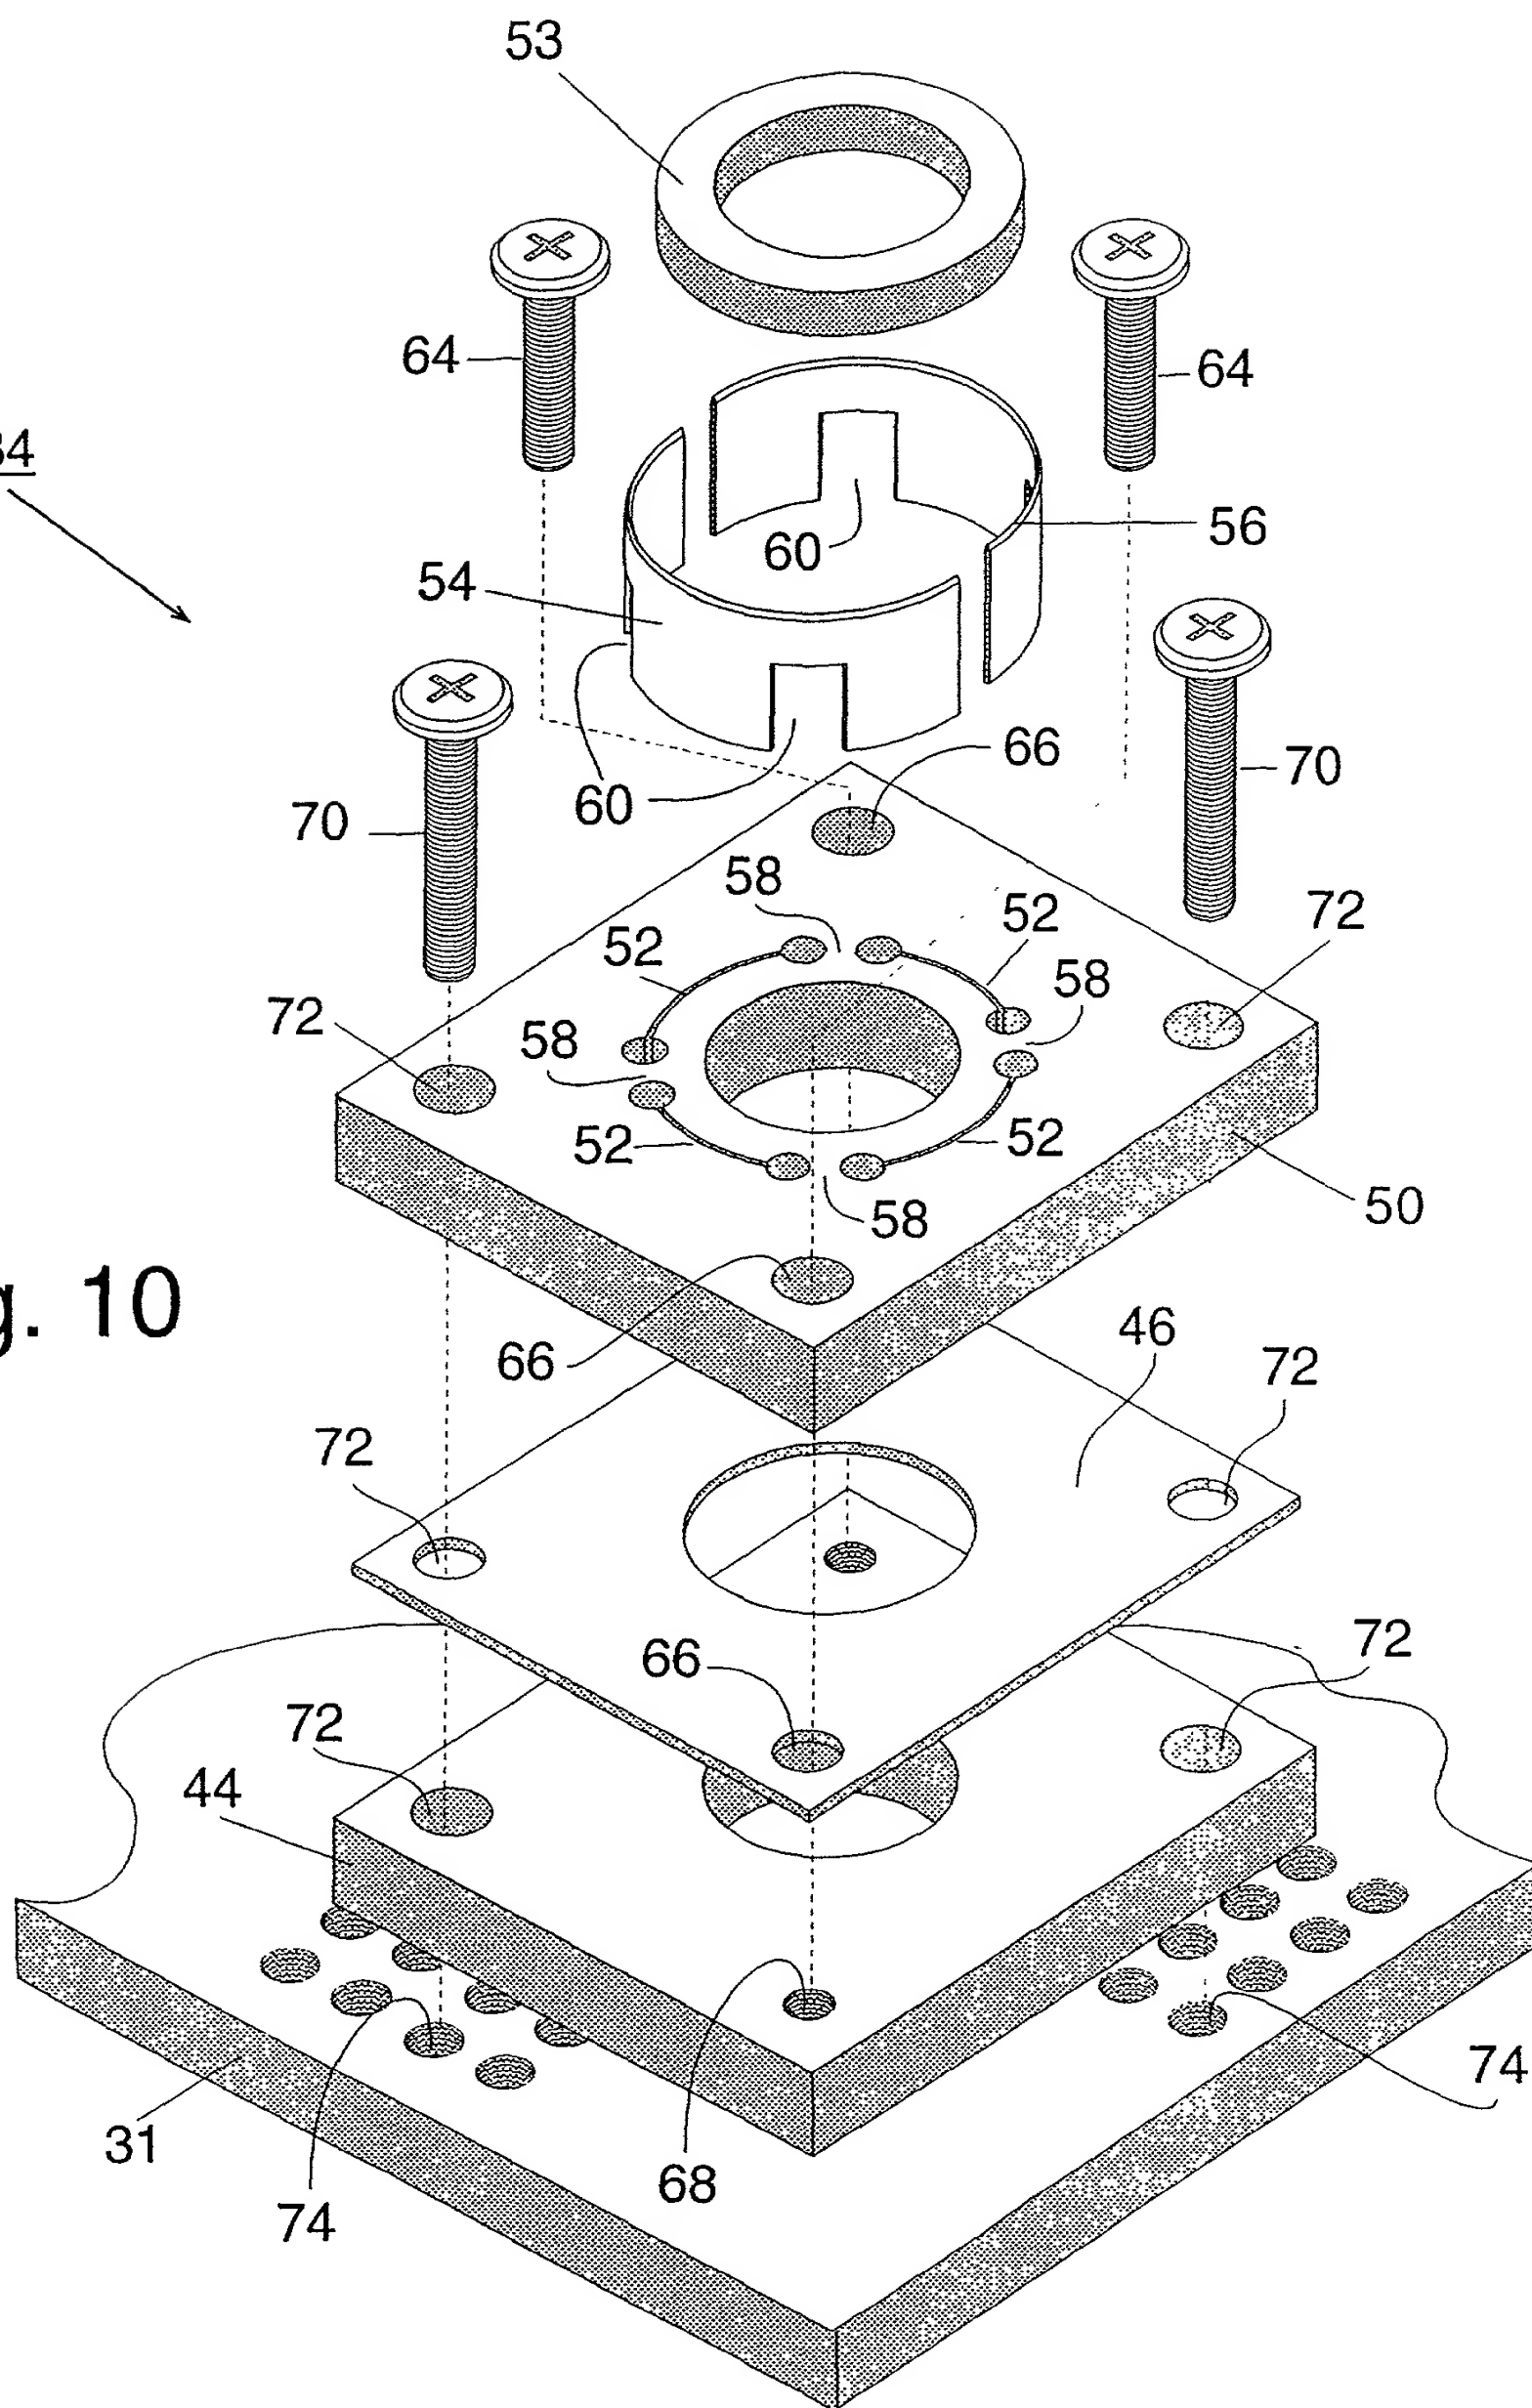


Fig. 10


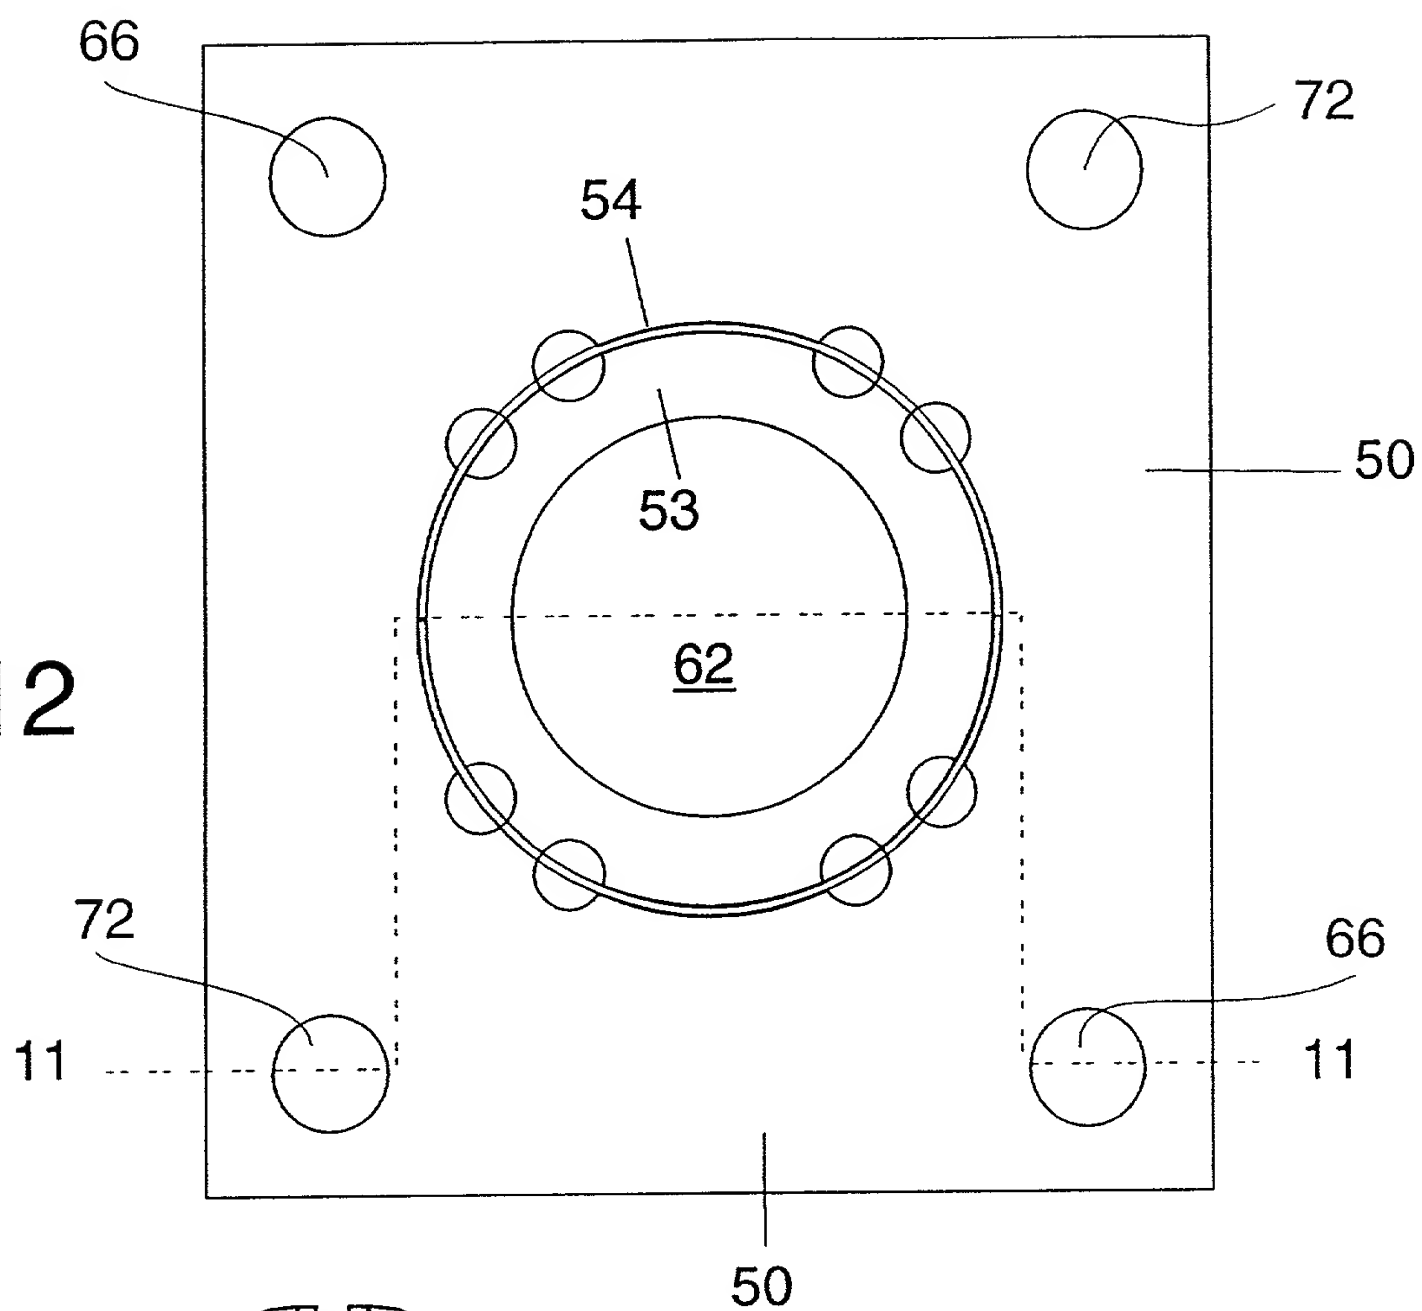


Fig. 11

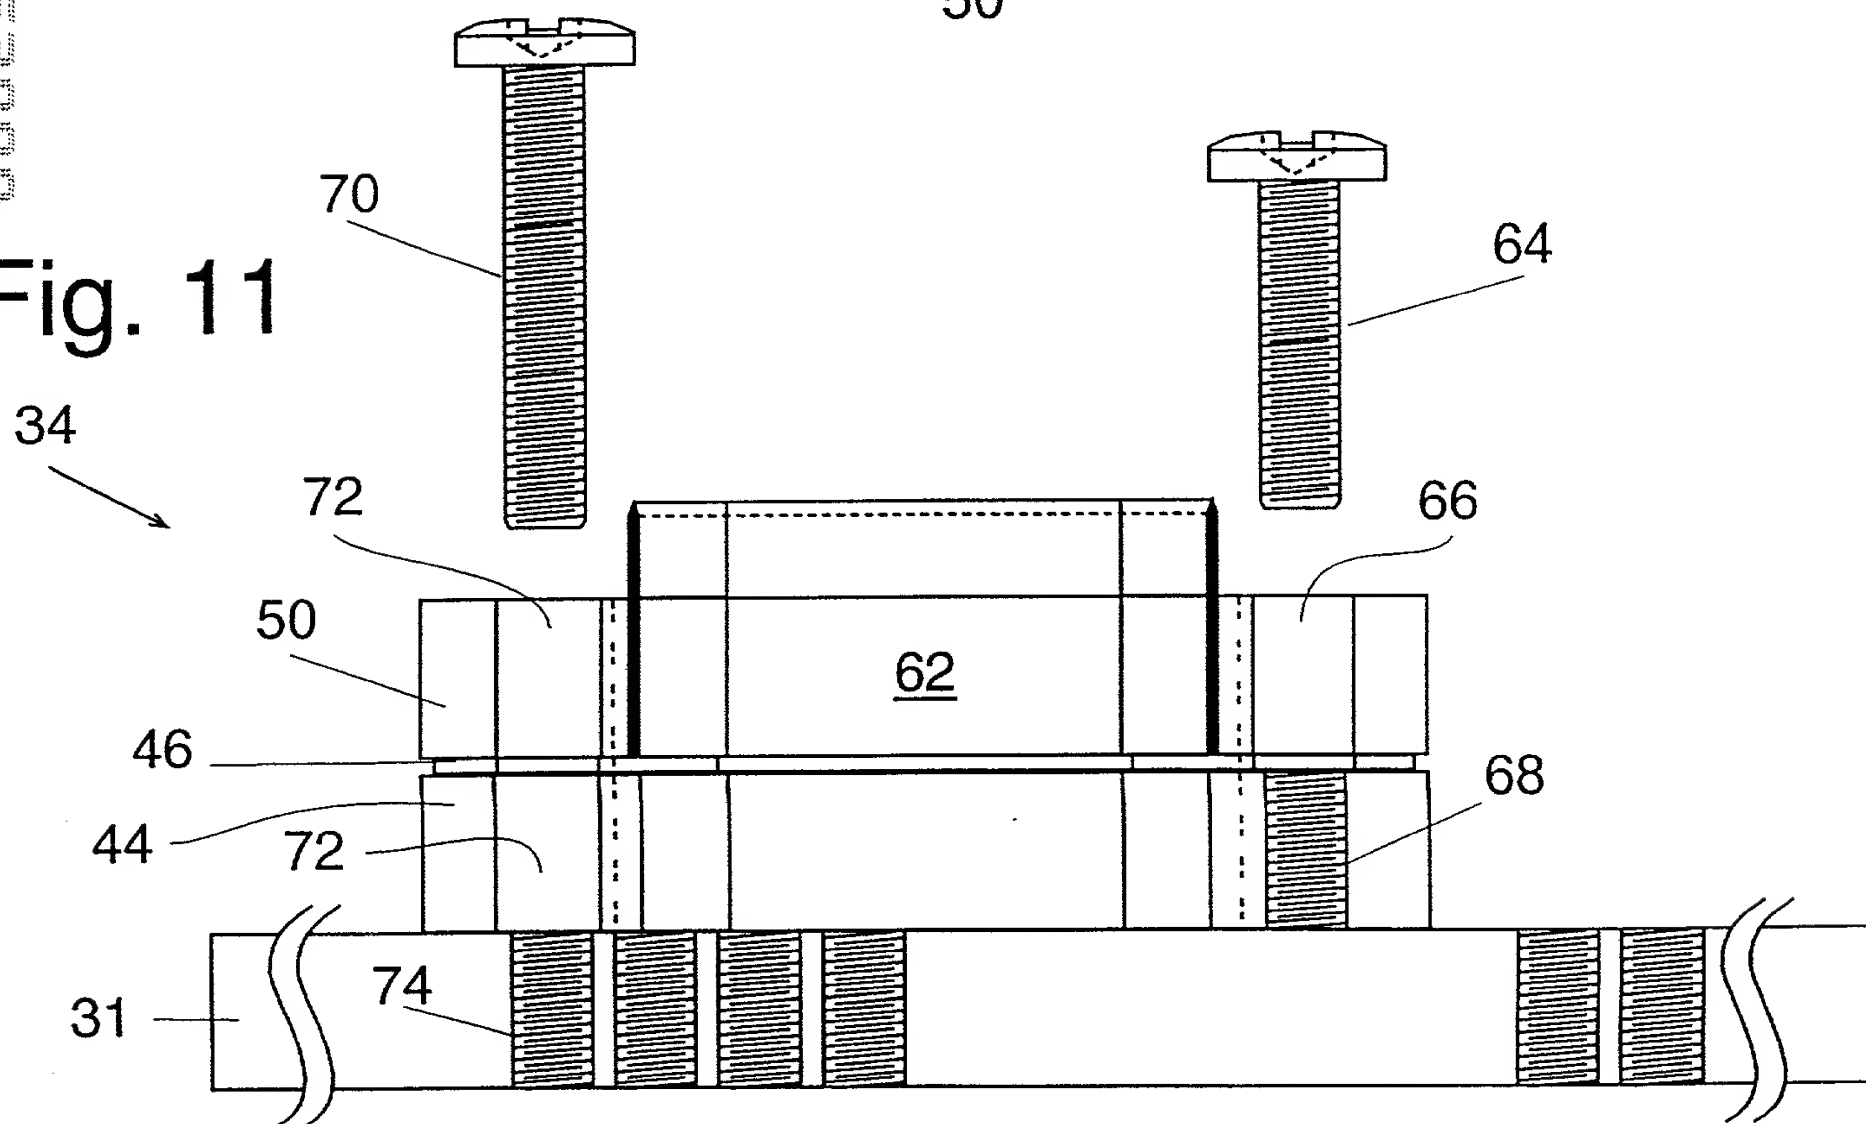

60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532
 533
 534
 535
 536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576

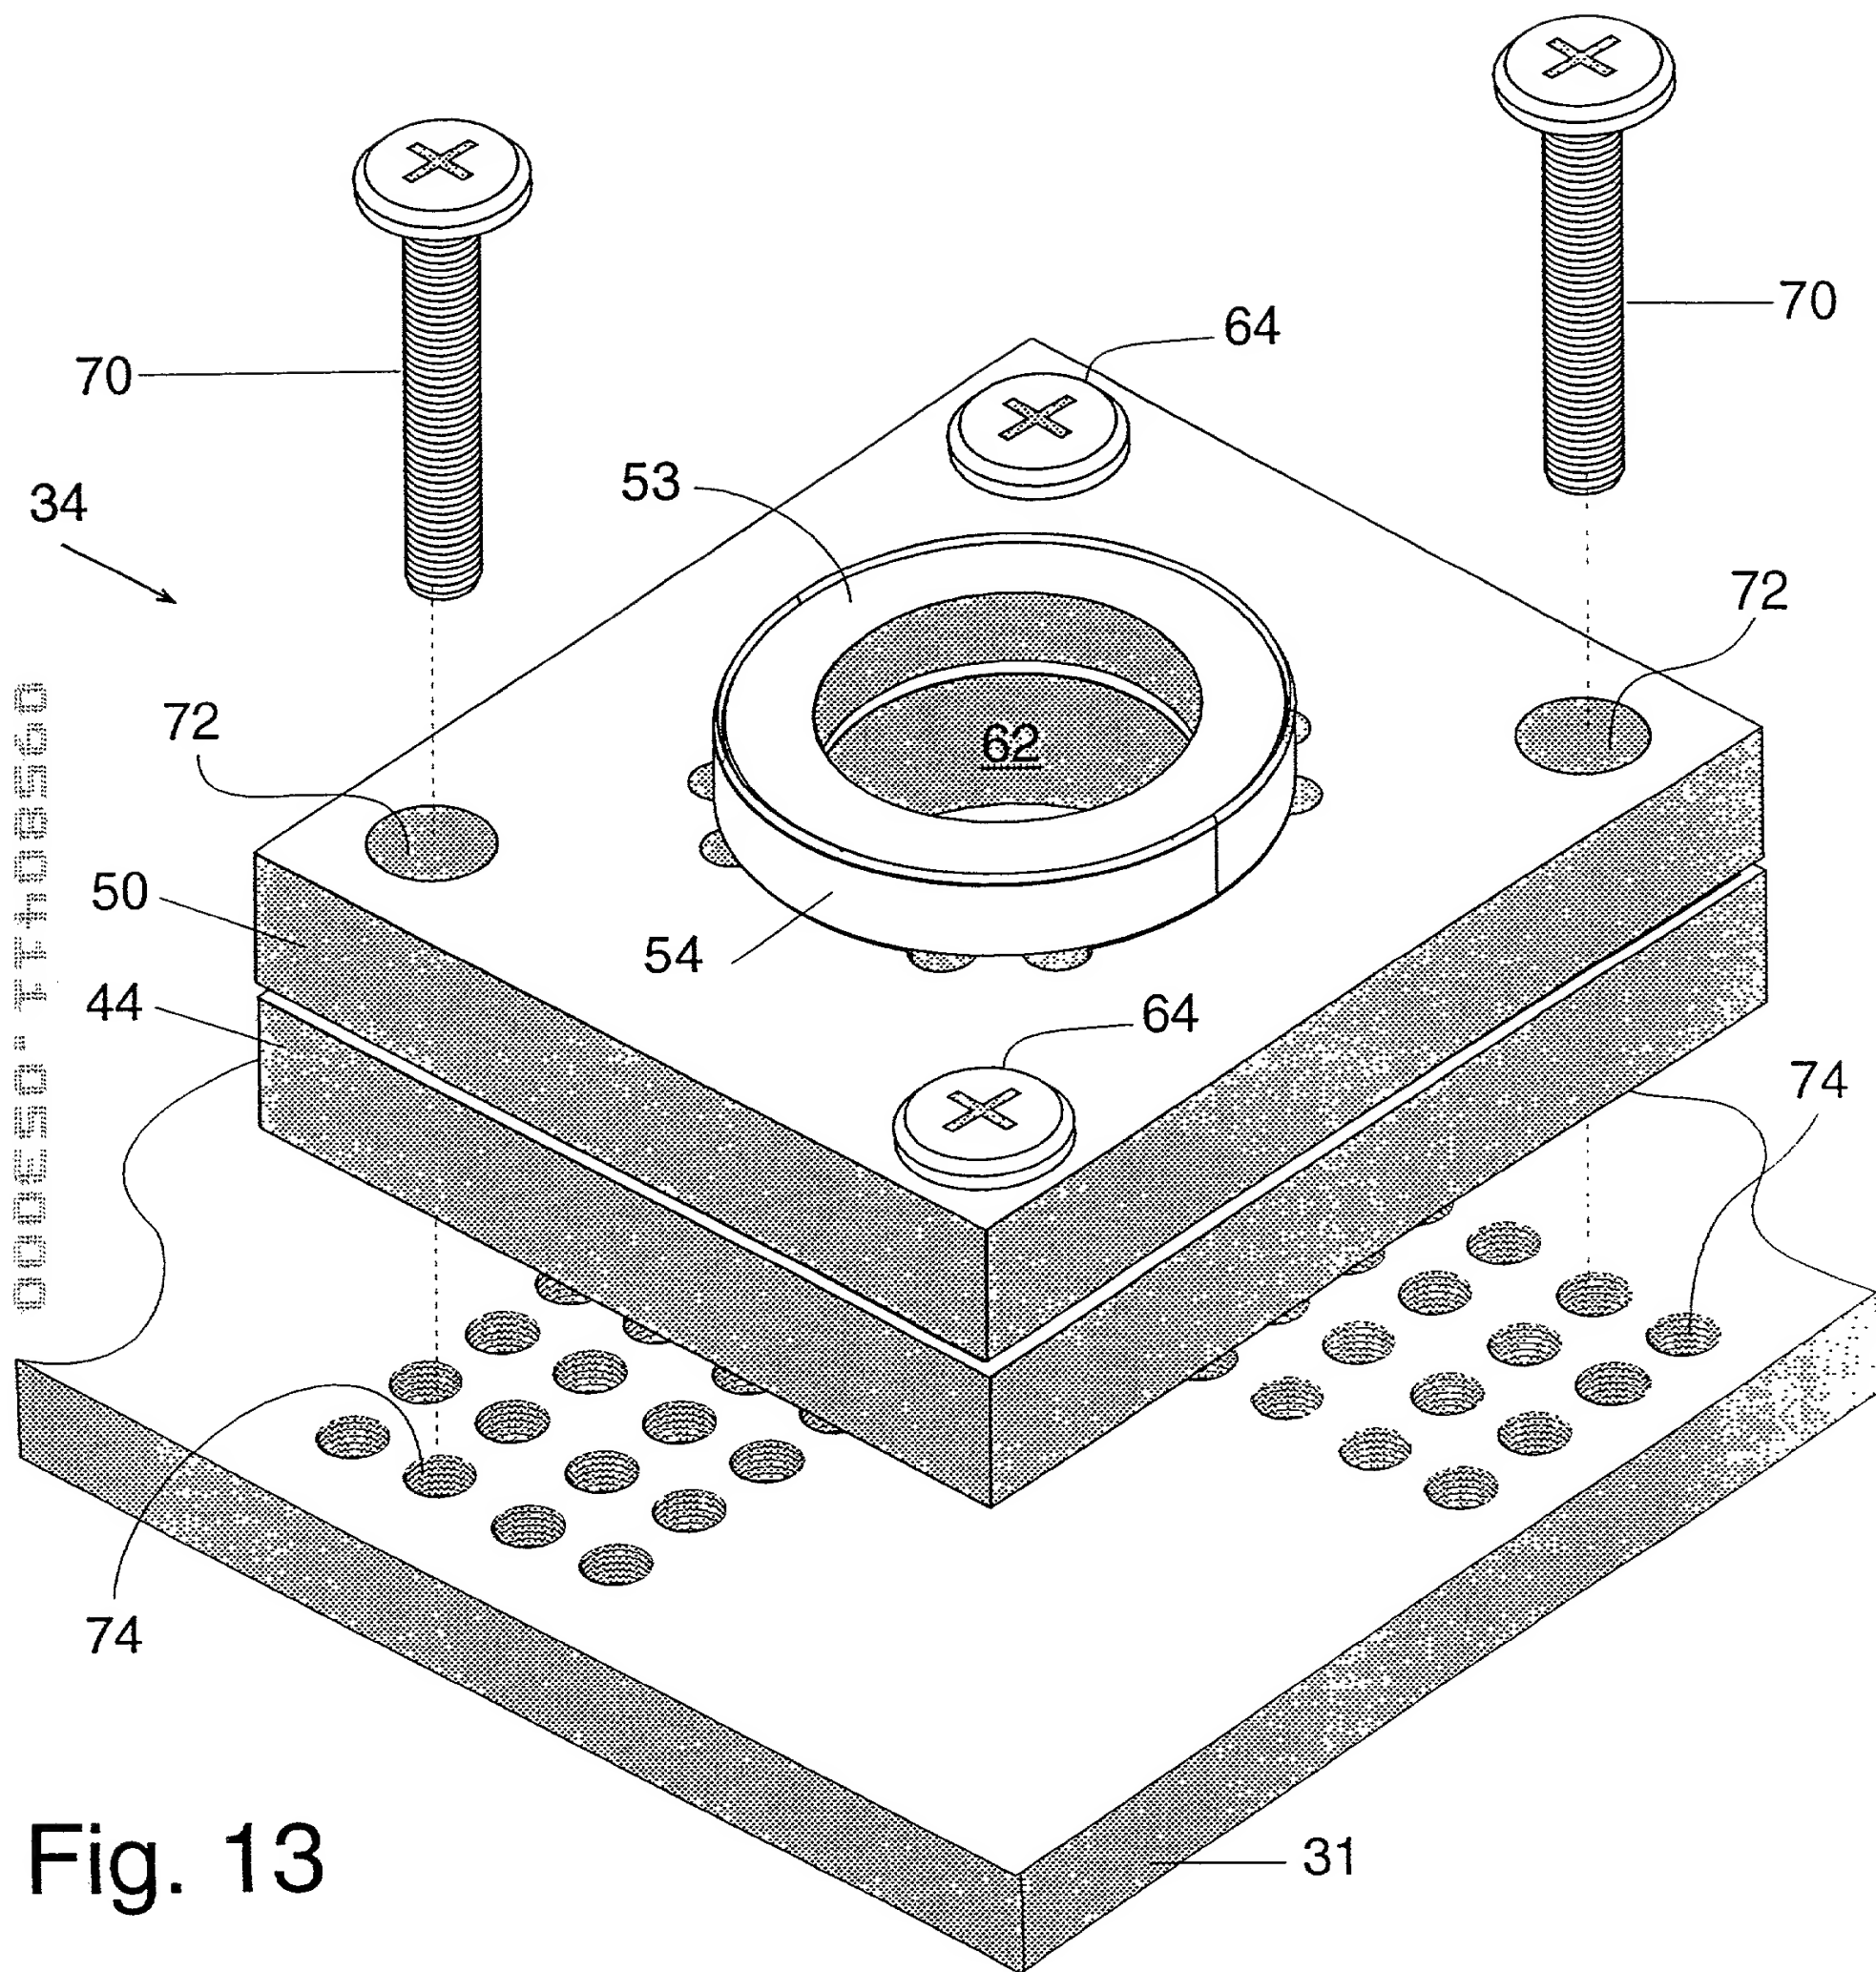


Fig. 13

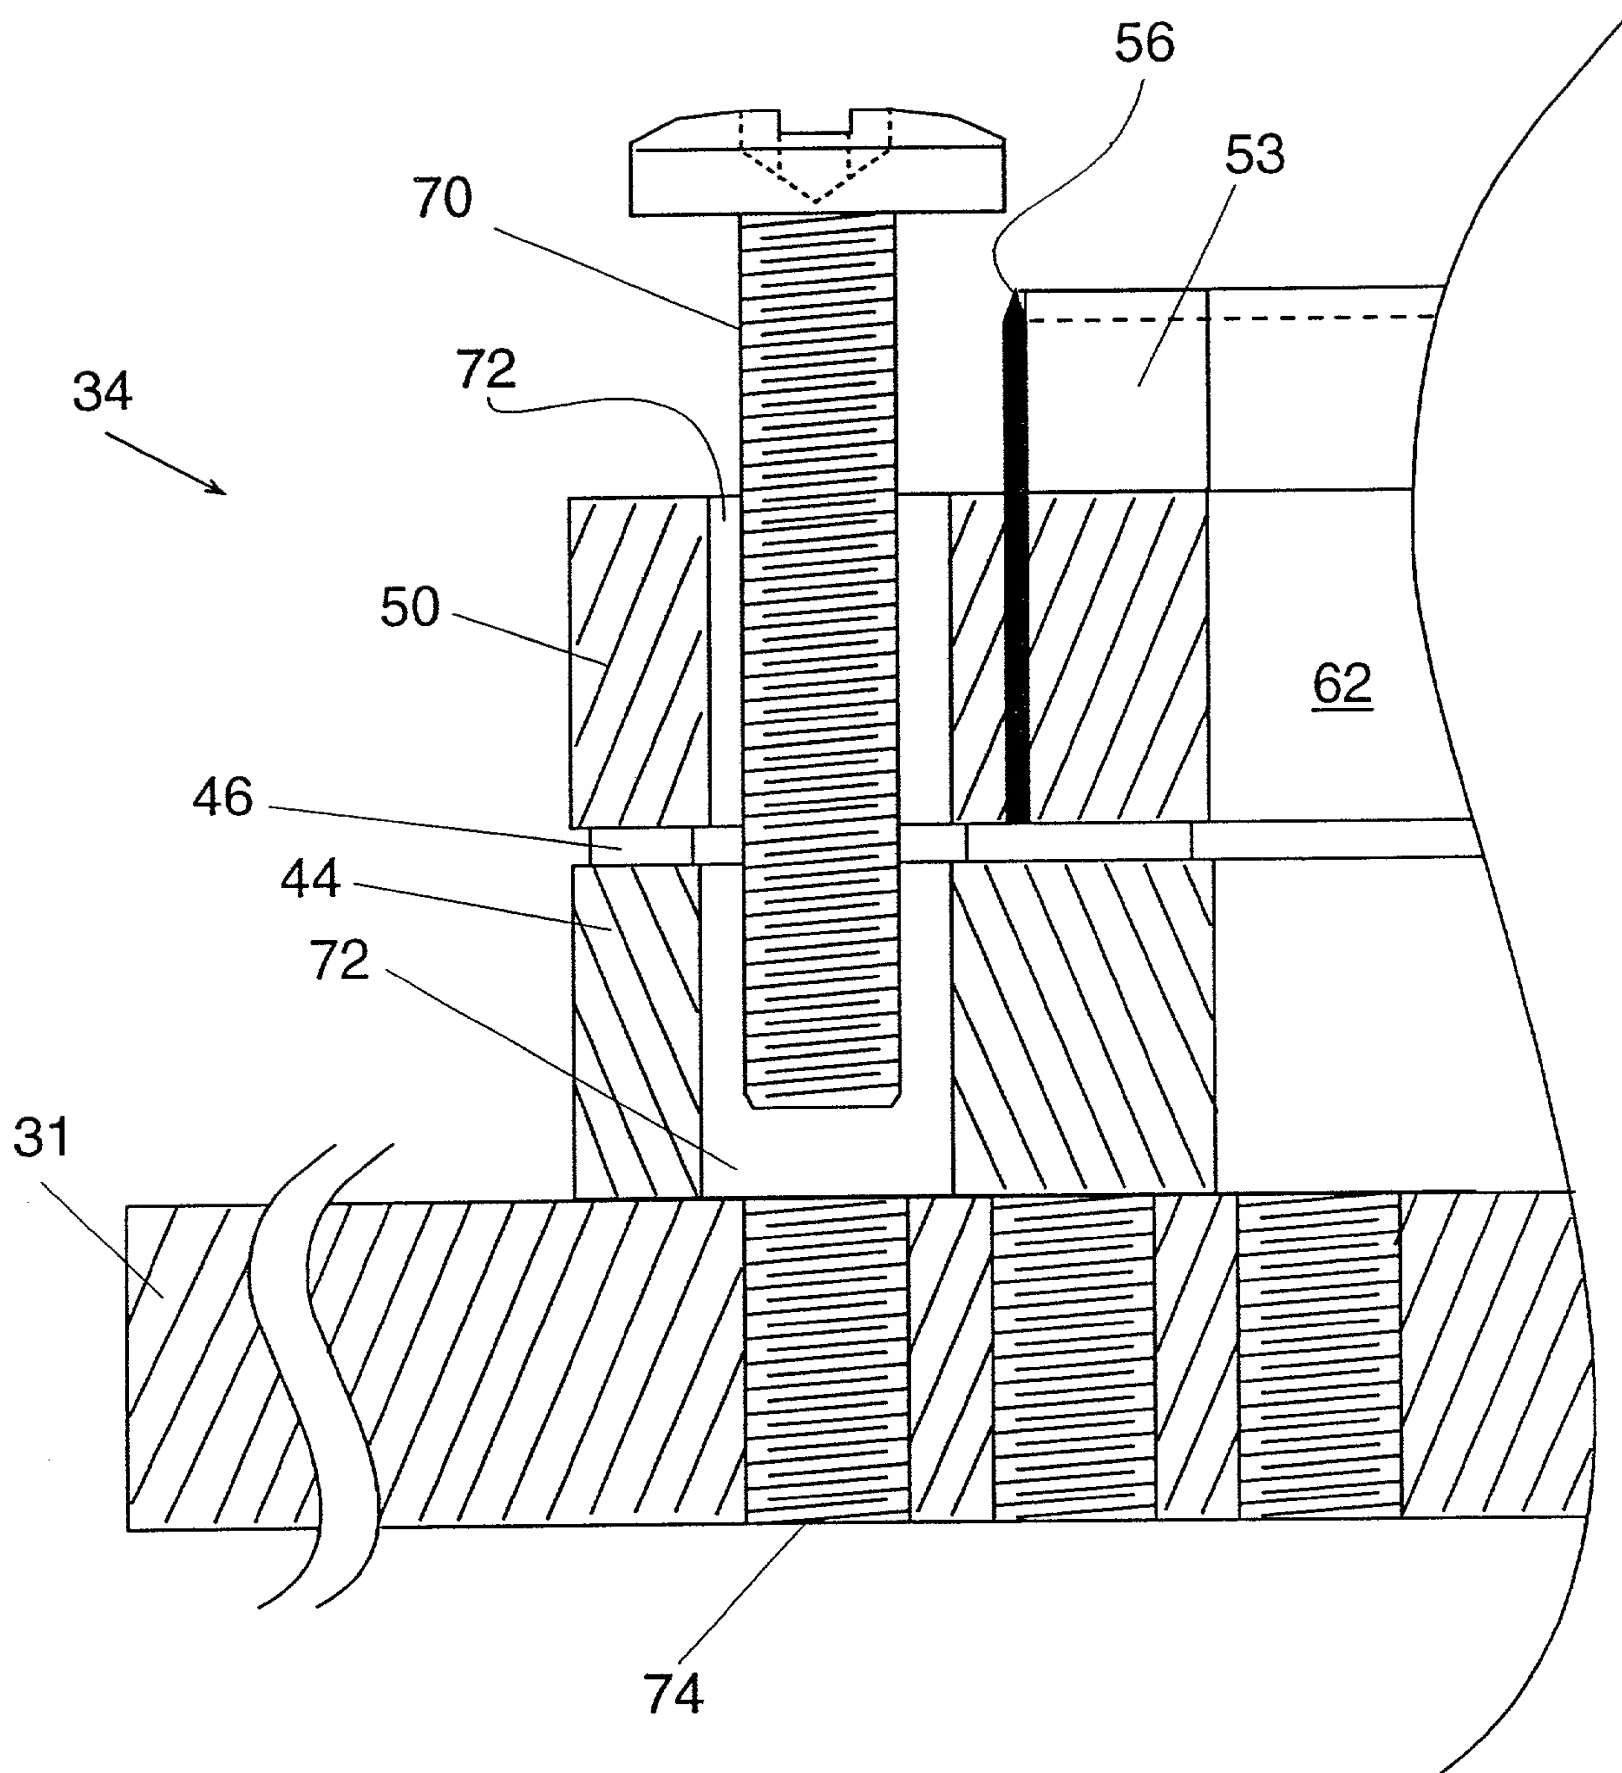


Fig. 14

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	7948
	First Named Inventor	Henry H. Jenkins
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Compensating Blister Die Cutter Apparatus

the specification of which

(Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box →



PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Kenneth L. Mitchell	36,873		
Charles R. Rust	18,716		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label

OR ☒ Correspondence address below

Name	Charles R. Rust				
Address	Woodling, Krost & Rust				
Address	1801 East Ninth St. - Suite 1520				
City	Cleveland	State	OH	ZIP	44114
Country	United States	Telephone	216/241-4150	Fax	216/241-4043

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
Henry H.		Jenkins			
Inventor's Signature				Date	5/16/00
Residence: City	Medford	State	OR	Country	United States
Post Office Address	602 Parsons Drive				
Post Office Address					
City	Medford	State	OR	ZIP	97501
				Country	USA

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto